

Filter Press Machine (เครื่องอัดตะกอน)



Simple in operation, convenient in maintenance, and safe in operation with multiple safety devices.

DE PERFECT


Solid-liquid separation in chemical, metallurgy, pharmaceutical, light industry, coal mining, foodstuff, textile, environmental protection, energy source and other industries. Mainly used for filter process with shortened filter cycle, high solid rate and improved filtering effects.

Chamber Filter Press



- *Widely used for various applications incl mining, waste water treatment, chemical etc.
- *Fully automatic
- *High feed pressure up to 16 bar as standard
- *Work temperature up to 95 deg C
- *Low operation cost, long life, easy to maintain and high efficiency
- *Size from 630mmx630mm to 2000mmx2000mm
- *Customized model and product are available

Filter Plate (แผ่นกรองเครื่องอัดตะกอน)

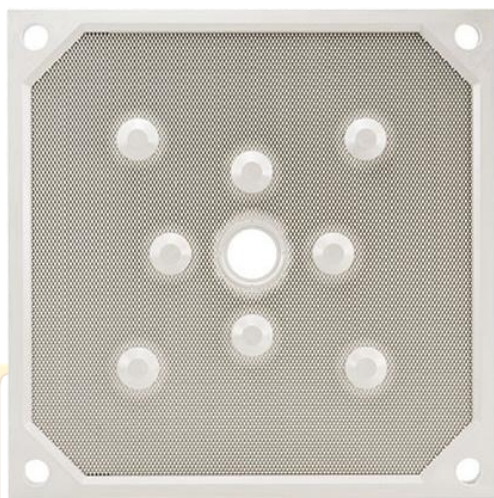

Material: Imported PP from Finland

Filter Plate Type

- Chamber Filter plate
- Membrane Filter plate
- CGR Filter plate

Technical Data of High Pressure PP Membrane Plate

MODEL	Plate Thickness (mm)	Cake Thickness (mm)	Chamber (mm)	Filtration Area (m ²)	Filtration Volume (m ³)	Weight (kg)
800x800	65	30	15	1	0.015	29
1000x1000	72	38	19	1.62	0.03	40

Technical Data of Recessed PP Filter Plate

MODEL	Plate Thickness (mm)	Cake Thickness (mm)	Chamber (mm)	Filtration Area (m ²)	Filtration Volume (m ³)	Weight (kg)
500x500	52	30	15	0.32	0.0048	8
630x630	55	30	15	0.6	0.009	18
800x800	60	30	15	1	0.015	25
1000x1000	70	40	20	1.62	0.032	35
1500x1500	80	40	20	3.8	0.076	95

Filter Cloth (ผ้ากรองเครื่องอัดตะกอน)

